

FOLIO 4 PTO-1390 (REV. 5-93)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER 476-1900	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.5) 09/509089	
INTERNATIONAL APPLICATION NO. PCT/GB98/02807		INTERNATIONAL FILING DATE September 21, 1998		PRIORITY DATE CLAIMED September 22, 1997	
TITLE OF INVENTION Transporting Multiprotocol Datagrams					
APPLICANT(S) FOR DO/EO/US Simon Daniel Brueckheimer, Leslie Derek Humphrey and David John Stacey					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.					
2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.					
3. <input type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 37 U.S.C. 371(b) and PCT Articles 22 and 39(1).					
4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.					
5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))					
a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).					
b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau.					
c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).					
6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).					
7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))					
a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).					
b. <input type="checkbox"/> have been transmitted by the International Bureau.					
c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.					
d. <input checked="" type="checkbox"/> have not been made and will not be made.					
8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).					
9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).					
10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).					
Items 11. to 16. below concern other document(s) or information included:					
11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.					
12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.					
13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.					
<input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.					
14. <input type="checkbox"/> A substitute specification.					
15. <input type="checkbox"/> A change of power of attorney and/or address letter.					
16. <input type="checkbox"/> Other items or information:					

499 Rec'd PCT/PTO 21 MAR 2000

U.S. APPLICATION NO (If know, see 37 C.F.R. 1.50)		INTERNATIONAL APPLICATION NO		ATTORNEY'S DOCKET NUMBER	
09/509089		PCT/GB98/02807		476-1900	
17. <input checked="" type="checkbox"/> The following fees are submitted:				CALCULATIONS	PTO USE ONLY
Basic National Fee 37 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO \$840.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) . \$670.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$760.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$970.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$96.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$840	
Surcharge of \$130.00 for furnishing the oath or declaration later than _ 20 _ 30 months from the earliest claimed priority date (37 CFR 1.492(e)).					
Claims	Number Filed	Number Extra	Rate		
Total Claims	11 - 20 =	0	X \$18.00	0	
Independent Claims	3 - 3 =	0	X \$78.00	0	
Multiple dependent claim(s) (if applicable)			+ \$260.00	0	
TOTAL OF ABOVE CALCULATIONS =				840	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28).				-----	
SUBTOTAL =				840	
Processing fee of \$130.00 for furnishing the English translation later than _ 20 _ 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				-----	
TOTAL NATIONAL FEE =				840	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				-----	
TOTAL FEES ENCLOSED =				840	
				Amount to be refunded:	
				Charged	
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>840</u> to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. <u>12-0913</u> in the amount of \$ <u> </u> to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>12-0913</u> . A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO: William M. Lee, Jr. Lee, Mann, Smith, McWilliams, Sweeney & Ohlson P.O. Box 2786 Chicago, Illinois 60690-2786 (312) 368-1300					
				SIGNATURE <u>William M. Lee, Jr.</u> NAME William M. Lee, Jr. 26,935 REGISTRATION NUMBER	

476-1900

09/509089
422 Rec'd PCT/PTO 21 MAR 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE THE APPLICATION OF)
Simon Daniel Brueckheimer et al.)
SERIAL NO.: To be Assigned)
FILED: Herewith)
FOR: Transporting Multiprotocol Datagrams)

AMENDMENT ACCOMPANYING APPLICATION

Honorable Commissioner of
Patents and Trademarks
Washington, D.C. 20231

Dear Sir:

The present application is the national filing of International Application No. PCT/GB98/02807. Before calculation of the filing fee in the United States, it is requested that the application be amended as follows:

In the Claims

Claim 5, line 1, delete "any one of claims 1 to 4" and substitute - - claim 1 - -


Remarks

The above amendments are being made in order to eliminate multiple dependency from the application before calculation of the application filing fee. Should any multiple dependent claims remain, that is unintended, and the Patent and Trademark Office is requested to cancel any remaining multiple dependent claims without prejudice before calculation of the application filing fee.

Examination of the application on its merits is awaited.

March 21, 2000

Respectfully submitted,


William M. Lee, Jr.
Registration No. 26,935

Lee, Mann, Smith, McWilliams,
Sweeney & Ohlson
P.O. Box 2786
Chicago, Illinois 60690-2786
(312) 368-6620
(312) 368-0034 (fax)

TRANSPORTING MULTIPROTOCOL DATAGRAMS

This invention relates to a system and method for the transport of multi-
5 protocol datagrams over an ATM network. The invention further relates to
an improved point to point protocol for the transport of datagrams.

BACKGROUND OF THE INVENTION

The current point to point protocol (PPP) provides a common standard for
transporting multi-protocol datagrams over a point-to-point link. It provides
10 the features of encapsulation, link configuration, maintenance, and
authentication. PPP is used in many applications. In particular, the protocol
has found significant usage for dial-up access to the Internet via the PSTN.
The PPP protocol has been defined by the Internet Engineering Traffic
Forum (IETF) and a general description of the protocol is given in 'The point
15 to point protocol, editor W. Simpson, July 1994, IETF RFC 1661'. A
number of different datagram protocols or formats are provided for and
these are allocated corresponding identifier numbers in IETF document
RFC 1700, editor J. Reynolds, October 1994.

It will be appreciated that the different services that are supported by the
20 PPP protocol have different quality of service (QoS) criteria. In current
systems, this necessitates a separate channel with appropriate band width
for each quality of service. This is wasteful in terms of traffic handling
capacity, particularly where a single user has set up a multi-protocol PPP
session and will need to occupy a number of channels.

SUMMARY OF THE INVENTION

An object of the invention is to provide an improved system and method for
the transport of PPP traffic over an ATM network.

According to one aspect of the invention there is provided a method of
transporting point to point protocol (PPP) traffic over an asynchronous
30 transport link, the method including encapsulating the traffic in minicells,
and transporting said minicells in a single virtual circuit.

In a further aspect, the invention provides a method of trunking PPP sessions such that the multiple sessions are transported in a single virtual channel.

In another aspect, the invention provides a method and arrangement for trunking PPP media in a groomed manner in the same or alternate virtual channels together with non-PPP traffic without adverse effect on the QoS of these services.

ATM adaptation layer two (AAL2) is a newly emerging standard which is being developed by the ITU-T for the transport of variable length packets over ATM networks. In this standard, a single AAL2 virtual circuit (VC) contains a multiplex of up to 256 individual data channels (commonly referred to as minichannels). Unlike traditional ATM, the packet payload size is arbitrary. A single AAL2 packet may contain between 0 and 64 octets of payload. We have found that arbitrarily large datagram structures can be transported via a packet segmentation and re-assembly procedure that is also being defined as part of the standard. The AAL2 minichannel packets are multiplexed asynchronously into a single VC with a three byte packet header being used to identify the minichannel address and packet size.

We have found that AAL2 can be utilised to encapsulate PPP. Moreover, this encapsulation permits PPP to be used over any transport link supporting ATM. PPP operates over a dedicated circuit which could be either an ATM virtual circuit (VC) or an AAL2 minichannel. With our arrangement and method therefore, a single VC is always sufficient to fully encapsulate the PPP protocol. The distinct protocols that are encapsulated into a PPP session can be transported within individual AAL2 minichannels, or multiple PPP sessions may operate within the same VC or the same AAL2 minichannel. The use of AAL2 reduces the number of VCCs required, simplifies the encapsulation of PPP, and improves the efficiency of the encapsulation. Further the use of AAL2 enables the use of both SVC and PVC encapsulation and allows either dynamic or static configuration of the channel assignments. Additionally, AAL2 offers the benefit that the

multiplexing of the distinct protocols encapsulated in a PPP session may be performed in the protocol, PPP and AAL layers thereby providing flexible arrangements of network architectures and allowing existing applications to operate as if using a native IP network.

5 **BRIEF DESCRIPTION OF THE DRAWINGS**

Embodiments of the invention will now be described with reference to the accompanying drawings in which:-

Figure 1 is a schematic diagram illustrating a point to point (PPP) protocol stack;

10 Figure 2 shows the format of a PPP frame;

Figure 3 illustrates the multiplexing of AAL2 minicells into ATM;

Figure 4 shows an improved PPP stack according to a first embodiment of the invention;

15 Figure 5 illustrates the segmentation of a datagram over a number of minicells;

Figure 6 shows an improved PPP stack according to a second embodiment of the invention;

20

Figure 7 shows an arrangement for routing encapsulated PPP traffic; and

Figures 8 to 14 illustrate further embodiments of the invention;

25

DESCRIPTION OF PREFERRED EMBODIMENTS

Reference is first made to figures 1 and 2 which are introduced for explanatory purpose as an aid to better understanding of the invention.

Figure 1 illustrates the use of PPP to encapsulate datagrams over a dial up
30 link via the PSTN/ISDN. The point to point protocol (PPP) provides a common standard for transporting multi-protocol datagrams over point-to-

point links and is comprised of 3 main components. These are; a method for encapsulating datagrams from multiple protocols; a link control protocol (LCP) for establishing, configuring (including authentication), and testing the data-link connection; and a family of network control protocols (NCPs) for establishing and configuring different network-layer protocols (NLPs). The NCPs and NLPs are allocated as pairs in PPP. Thus IP is one example of an NLP and its associated control channel, the NCP, is referred to as IPCP. Figure 1 shows an example protocol stack where PPP is being used to encapsulate datagrams over a dial up link via the PSTN/ISDN.

In PPP, the protocol field is used to identify the datagram type. A number of protocol identifiers have been defined covering the variety of supported LCPs, NCPs and NLPs. The full list of currently defined protocol identifiers is found in the above referenced IETF RFC 1700 document. Typically, for commonly used protocols two identifiers are assigned, one for a control channel (the NCP) and one for the data (the NLP). There is a one-to-one relationship between assigned NCP/NLPs. For example IP data is assigned 0x0021 and the IP control channel (IPCP) of 0x8021. Although the protocol identifiers are two octets in length, their format has been defined such that high usage PPP datagrams (typically the NLPs) can be transmitted in an optional compressed one byte protocol field. To enable this, the assigned numbers are all defined such that the LSB of the most-significant octet is zero and the LSB of the least-significant octet is set to one. Thus it is always possible to distinguish between a full two-byte field and a compressed single byte field.

Referring now to figure 3, which is also included for explanatory purposes, this illustrates the multiplexing of AAL2 minicells. The AAL-2 adaptation layer was initially optimised to cope with the demands of low bit-rate communications, representing the increasing trend to greater voice compression. The adaptation layer is a multiplex of users in a single ATM connection, where each user's information is carried in a short packet,

sometimes referred to as a minicell, with a header identifying the user channel together with ancillary control information.

By sharing the fixed length payload of the ATM cell between users, the compromise of trading cell assembly delay for bandwidth efficiency is overcome, this being a sacrifice which would otherwise be acute at low bit-rates and on expensive leased lines. The AAL-2 adaptation equipment performs a concentration function to ensure high utilisation, but can also limit the holdover delay of traffic when usage is low.

In figure 3, each minicell carries a service specific payload or a structured data unit. A three octet header incorporates a channel identifier (CID), a length indicator and SSCS control. The minicells are assembled into ATM cells, each set of minicells being provided with a start field pointing to the start of the first minicell to effect cell delineation. Where an ATM cell is not completely filled, padding in the form of a dummy minicell may be provided to complete the payload. A further feature of minicells is that they may be of variable size, from 1 to 64 octets, to accommodate a wide variety of applications with minimal overhead. Additionally, a common methodology to segment and reassemble arbitrarily long datagram structures into the packet format is being standardised. We have found that AAL2 is suited to the encapsulation of any datagram structure regardless of length and that the adaptation and packetisation can be tailored to the requirements of the service being supported and not fixed to the underlying transport layer.

The mapping to ATM cells is fully asynchronous and in fact quite independent of the length of an ATM cell. The boundary of minicells in the ATM cell payload is signified in every cell by a start field (STF), which specifies the offset, and the minicells form a self-delineating flow. The AAL-2 protocol format can thus be employed to carry minicells transparently over access systems which have fixed frame formats other than ATM cells, such as MPEG-2 transport stream. In fact minicells do not require an ATM cell or

other frame structure at all, as it is possible to map the start field octet once every 48 octets (or other regular interval) with minicells in the intervening octet positions directly onto any physical bearer. The bearer identity can be used to regenerate the implicit ATM cell headers where the VCC needs to be transported over conventional ATM transmission.

The minicell is structured so that services of different types can be supported as service specific convergence sublayers (SSCS), all carried over the minicell common part sublayer (CPS) identically. The minicell header includes channel identity, length and user-to-user information (UUI), the latter allowing the functions of an SSCS to be specialised according to purpose. Examples of SSCS formats currently being defined are one to support voice and one to support data, including the functionality of segmentation and re-assembly (SAR) defined in the I.366.1 Standard.

Preferred embodiments of the invention will now be described below with reference to figures 4 to 13 of the accompanying drawings.

In a first exemplary embodiment of the invention illustrated in figure 4, there is a one to one static reference provided between the protocol identifier and the minichannel address. The 8 bit AAL2 address space provided within the CID (channel identifier) field of the packet header can be increased, on an as-needed basis, by using the first octet of the packet payload. The extension of the address space in this way is possible since in this instance the PPP is designed to operate over a point-to-point link and thus there is no switching at the AAL2 layer, only in the ATM layer. The PPP overhead is minimised by only sending the additional octet when needed (i.e. for the infrequently used protocol identifiers in the range 0x0200 to 0xffff). Thus in this embodiment, we adopt a similar paradigm to the compressed address option available within PPP. To achieve this the least-significant octet of the protocol identifier is transmitted in the CID field of the packet header, and when necessary the most-significant octet is transported in the first octet of the packet payload. The LSB of the least-significant octet is used to indicate the presence or absence of the most-significant octet. A zero

indicates no following most-significant octet; a one indicates a following most-significant octet. Thus for IP the user datagram (IP NLP = 0x021) would be indicated via the CID value of 0x20, whilst its control channel (ILCP NCP = 0x8021) would be indicated via a CID field of 0x21 followed by a first octet packet payload of 0x80, and the Link Control Protocol (LCP = 0xc021) would be indicated via a CID field of 0x21 followed by a first octet packet payload of 0xc0. There is no loss in generality in this approach of using the LSB of the CID field to indicate a further octet of addressing information since the PPP specification states that all protocol identifiers must be odd (to enable the optional compression to one byte) - thus this bit is not used as part of the PPP protocol address.

The LSB of the most-significant-octet (when used) provides a 1 bit parity check for error detection. Note that the LSB has no significance for the protocol identification. Further robustness against errors in this field is provided by the segmentation and re-assembly SSCS error detection capabilities which would operate over the complete set of payloads constituting a data frame.

The PPP information field is encapsulated into the AAL2 packet payload. A standardised SSCS segmentation and re-assembly (SAR) function enables arbitrary length information datagrams to be transported. Further since AAL2 supports variable length packets there is never a requirement to transport the optional padding field of PPP. This improves efficiency by avoiding the need to transmit what are effectively empty packets.

An advantage of this method of PPP encapsulation is that it is possible (via the CID) to provide differing levels of QoS to the different protocols encapsulated into the session.

In a second embodiment of the invention, which exploits the limited number of protocol identifiers that are currently allocated, only seventy identifier numbers are currently assigned. Thus the 16 bits assigned to the protocol identifier field is significantly larger than needed. The 8-bit CID field of the AAL2 packet header is therefore completely sufficient to identify the current number of assigned identifiers, with significant further capability for future

expansion. In this second aspect of the invention therefore, we provide a pre-configured table of CID values. Each CID value is assigned one of the PPP assigned numbers. The assignment of CID values to PPP identifiers may be predetermined by a recognised standards procedure or could be set-up on a link-by-link basis via a management function or meta-signalling.

In a further embodiment of the invention, use is made of the AAL2 negotiation procedures (ANP) to establish and manage PPP sessions. In this embodiment, an AAL2 VC is set-up in the normal manner via management or signalling. On initialisation, the VC will contain a single minichannel as normal- the ANP channel. To establish a PPP session the requesting entity initiates ANP to establish an LCP channel. The ANP negotiates the establishment of a minichannel in the normal manner. The LCP channel can then establish and configure the PPP session in the normal manner. Once established, the individual NLP/NCP channels are established in a similar manner to the second embodiment described above - with the exception that the ANP is used to set-up and tear down the individual minichannels. The NCP can use AMD when for example establishing cut-through sessions.

An advantage of this embodiment is that a single VC may be used to establish multiple PPP sessions. A standard AAL2 relay function can be used to route the PPP sessions to different points within the network. Thus for example a home user might have two simultaneous PPP sessions established, one to a corporate Intranet and one to a commercial ISP. Over the access network these two sessions are encapsulated into a single VC. At the interface to the core ATM network a relay function can be used to relay all PPP sessions to a particular route (say the ISP) in a single VC. Thus at all points in the network, the number of VCs used is minimised so as to reduce the associated signalling overhead.

A further advantage of this embodiment is that it has the ability to transport both PPP sessions and non-PPP session in the same VC. For example, a voice call can be sent in the same channel as a PPP encapsulate Internet

session thus ensuring VC signalling and establishment is minimised and optimising the utilisation of bandwidth within a VC.

Figure 5 illustrates the segmentation of long datagrams over a number of minicells. The PPP information together with the protocol identifier is mapped into the payload of a datagram which is provided with a trailer comprising UUI, CPI, LI and CRC fields or as specified by the AAL5 and/or the I.366.1 standards. The datagram payload is then segmented into 63 byte portions which are mapped into the minicell payload, this being provided with a header comprising CID, LI, UUI, CRC and multiplex MID fields. The LSB of the UUI field provides an indicator of the continuation/end of a segmented datagram

A further extension to this embodiment can be achieved by extending the SSCS function that performs the SAR to include the ability to multiplex at the SSCS layer. In this way, multiple sources can be multiplexed into a single AAL2 minichannel. This enables a choice to be made as to how the individual PPP channels are encapsulated into AAL2 (via multiplexing at the SSCS or CPS layer). Thus a full PPP session could be encapsulated into a single AAL2 minichannel enabling the number of simultaneous PPP sessions within a single VC to be maximised, or a separate minichannel could be used to encapsulate a single protocol of the PPP session only. Typically one might wish to allocate an AAL2 channel to each level of priority within the PPP session. - Thus all delay sensitive channels might be encapsulated into a single CID and all delay insensitive channels into a further CID. The ability of AAL2 to prioritise minichannels can then be used to ensure the delay sensitive services are subjected to minimum delay. The extended PPP2 stack for these embodiments is shown schematically in figure 6.

As discussed above, the AAL2 minichannels form an asynchronous self-delineating stream that is carried within ATM payloads. Thus the ATM cells essentially perform a transport function only. Therefore AAL2 minichannels can be carried directly over any regular transport structure (for example MPEG-2 TS frames or TDMA time slots) without the need to carry ATM.

Thus, by using our arrangement, the use of PPP2 can be extended to cover any regular transport structure used in the access network. A relay point at the interface to the ATM core network can be used to readapt the minichannels into and out of ATM cells.

- 5 The flexibility of the AAL2 encapsulation of PPP sessions can be further extended by enhancement of the AAL2 SAR function to include the ability to multiplex messages within the SSCS layer in a manner analogous to the AAL3/4 protocols. The format of the SSCS SAR is shown schematically in figure 7. Referring to this figure, the format is compatible with current ITU-T
- 10 proposals (e.g. I.366.1 AAL2 SAR) and includes an optional eight byte trailer that is added to the datagram to be segmented. The segmented datagram forms the payload of an appropriate number of AAL2 packets each incorporating a header and a UUI (user to user information) field. A single flag is coded into the UUI bits to indicate whether the particular
- 15 datagram with its optional trailer extends into a following AAL2 packet or whether the current packet is in fact the last packet of the sequence. In particular, a multiplex identifier (MID) field is added to the SSCS to enable multiple messages to be interleaved in parallel within one minichannel. To provide the MID field in a preferred embodiment, a single
- 20 octet at the beginning of each AAL2 packet payload may be used. The MID field can, in a further embodiment, be longer than a single octet and can be used in conjunction with four bits of the UUI field to form an extended UUI field. This extended field can be formatted into a continuation/end (CE) flag (one bit), an eight bit MID field and a three bit
- 25 CRC field providing error detection over the extended UUI field. Thus, with the extended SAR function, it is possible to concentrate multiple PPP sessions, the protocols thereof and/or multiple IP sessions into a single AAL2 CID. This will be of advantage when used with the next generation of mobile communicators which will have the ability to send and receive
- 30 electronic mail and to perform Internet browsing in addition to the standard function of making calls. Using the techniques described herein it is possible to encapsulate multiple PPP sessions from several terminals into a

single CID between a base station and a mobile switching centre thus freeing a significant number of CIDs for the encapsulation of low delay voice calls.

The MID can be configured to the payload alone allowing full point code
5 usage of the UUI field in the AAL2 CPS header. If required, error correction may be provided via a suitable parity or coding scheme.

The use of AAL2 together with a suitable SAR SSCS (Service Specific Convergence Sublayer) function provides the ability to transport PPP sessions in a very flexible manner, and the PPP sessions can be
10 encapsulated in a number of ways which will be discussed below.

Figure 8 together with its associated logic diagram (figure 8a) illustrates in schematic form a single PPP session directly encapsulated into an AAL2 VCC (virtual channel connection). In the simplest case, the whole of the AAL2 is dedicated to transporting the PPP session in one CID only. In this
15 arrangement, one CID per PPP2 session is established by the AAL2 negotiating procedure (ANP) at call set up. A protocol identifier (PID) may be provided in every payload to differentiate between protocols, but this of course does not extend to the support of multiple IP sessions per PPP2 session unless sequenced by higher layers. Alternatively, the PID can be
20 provided in the first segment whereby the AAL2 SSCS SAR ensures sequencing, i.e. a non-parallel implementation.

The arrangement of figure 8 reduces the number of ATM voice VCs required, especially when combined with AAL2 access carrying other real time media over AAL5. It further allows common routing of media and can
25 still provide different QoS over AAL5, as voice traffic can take priority over PPP2. Multiple PPP2 sessions are possible in the same VC. Thus, a single PC or user terminal can function as a router for a source IP network, or an application such as H.323 can have media going to different end points.

30 In a modification of this arrangement illustrated schematically in the logic diagram of figure 8b, a CID is provided for each PPP protocol from multiple PPP sessions and a MID is employed to determine the session per protocol

due to the AAL2 segmentation. This provides access concentration of protocols, e.g. in mobile applications where traffic can be routed to IP and to non-IP data networks.

- In another embodiment illustrated schematically in figure 9 together with the associated logic diagram of figure 9a, an entire VCC can be allocated to the transport of a PPP session in which each protocol can be treated in a different manner, e.g. offering a higher QoS (quality of service) for delay sensitive services, the use of CRCs (cyclic redundancy codes) for data traffic, and SNs for voice traffic. Additionally, the ANP can be used to establish minicells for the PPP protocols or sessions on demand. Thus, it is possible to support both the PPP session containing multiple CIDs and additional traffic within the same VCC. Multiple PPP sessions can be supported in a single AAL2 VCC where multiple CIDs are allocated to each session. Similarly, the VC can also support non-PPP traffic.
- In the embodiment of figure 9, one CID per protocol can be established, in the dynamic case, under direction from the ANP, or, in the static case, without the ANP and by mapping the PID to the CID. The dynamic case can extend to IP sessions within a given PPP2 session and protocol by using NCP (network control program) to control the ANP and then providing a cut-through similar to multi-protocol over ATM (MPOA). If there are multiple IP sessions in the protocol, an MID (multiplexing identifier) is required where there is no cut-through and can be used to suppress the header. The arrangement allows different QoS control of different protocols, or different IP sessions in cut-through applications. All protocols can terminate at the same ATM end points, or an AAL2 relay with a PPP2 stack can be deployed to extend to virtual end points.

- In the embodiment shown in figure 10 and its associated logic diagram figure 10a, there is one CID per PPP2 protocol session, e.g. as described above with reference to figure 8, but applied to the IP connections for the purpose of cut-through. The NCP uses the ANP to establish the cut-through route. The MID is not required. As shown in figure 10, the AAL2 relay uses LCP (Link Control Protocol) to perform authentication for each

possible end point. The adapter/router performs cut-through and suppresses the IP header on connection oriented sessions.

Different QoS criteria can be applied to different IP sessions which could, for example, be different media components of an H.323 session. Different treatments for media or for protocols can be applied simultaneously. The use of TCP/IP header suppression significantly improves the efficient use of bandwidth. Further, the adapter/router can map alternately several PP (point to point) sessions. Advantageously, the same CID is used so that the AAL2 relay functions as a virtual router.

- 5 In the embodiment shown in figure 11 and the associated logic diagram 11a, multiple PPP sessions are transported in a single VCC, and all of the sessions are captured in a single CID. This arrangement can be used where it is desirable too aggregate many PPP sessions, for example between routers, whilst minimising the number of minichannels used. This has particular advantage in mobile applications.

15 In figure 11, the CID is established by the ANP for single or multiple LCP with a multiplex indicator to identify the session and to perform authentication and control. This is also of advantage in mobile applications where a base station may need to isolate data from several mobiles to ensure that voice is given a higher QoS than the collective data. The MID can be used to distinguish the PPP2 session ID, the PID and IP session as a multiplex of datagrams.

20 In the modification indicated in Fig 12 and in the associated logic diagram of figure 11b, a CID is provided per set of IP sessions from multiple PPP2 sessions. This permits a cut-through route to be established for similarly routed IP sessions. The MID is required to distinguish the sessions and this allows suppression of the IP header. The AAL2 network then becomes a virtual routing network. Multiple H.323 sessions are possible and efficient routes can be created to ISP networks.

- 30 Referring now to figure 13, this shows an arrangement for transporting encapsulated PPP traffic over an asynchronous link and for trunking voice calls such that the multiple voice channels form a trunk group carried over a

single point to point protocol (PPP) ATM trunk. In this arrangement, PPP sessions can be set up between work stations 61 via Ethernet switches 62, network adapters 63 and an ATM transport network 64. H323 gatekeepers 65 are coupled one to each Ethernet switch 62, and each network adapter is coupled to an ISDN call handler 66. The figure illustrates the establishment of a PPP session between two work stations 61a and 61b. In this arrangement, PPP2 is the IETF (Internet Engineering Task Force) protocol that is adapted to utilise an AAL2 VC. PPP2 eliminates IP headers and compresses the RTP/UDP (real time protocol/user data protocol) typically to three bytes.

The H323 standard provides three types of signalling channel, these being indicated on figure 12. An RAS channel enables registration, authentication and status to establish that the user is authorised for the H323 service. A Q931 ISDN signalling channel is set up to the ISDN call handler to effect calls. When the user makes a call, the third signalling channel is established end to end between the participating work stations or terminals and is used to negotiate the connectivity of the two terminals, to establish the particular coding to be employed and to support the voice channel end to end. The H245 control channel is intercepted to negotiate PCM voice and to apply compression and silence suppression. The voice channel provides a trunk link between the network adapters. Over this trunk link, multiplexing is used to fill the AAL2 cell and thus maximise capacity.

Figure 14 illustrates a full H.323 application with multiple media. H.323 terminals 141 using H.225 call signalling may be coupled via an Ethernet 142 and an adapter/router 143 to an ATM network 144 performing an AAL2 relay function to carry a PPP2 session to a further Ethernet 142a or to a PSTN 148. A gatekeeper 145 retains a dialling plan and address resolution. A call handler 146 associated with the adapter/router 143 is arranged to set up a VC, e.g. via the Q2931 protocol. Alternatively the call handler can use the ANP to set up a PPP2 session to each end point from an address provided by the gatekeeper. The LCP and IP NCP establish IP networking. The call handler can also function as an H.245 signal router to

negotiate IP media sessions and router ascribed PPP2 sessions to the correct end point based on the IP address.

The arrangements and method described above provide for flexibility in multiplexing. In particular, multiple PPP sessions can be multiplexed on the same VC, or PPP sessions can be multiplexed with other services on the same VC. There can be one PPP session per CID, or multiple PPP sessions per CID, or multiple CIDs per PPP session. Other combinations or variants will be apparent to the skilled worker.

It will be understood that the above description of a preferred embodiment is given by way of example only and that various modifications may be made by those skilled in the art without departing from the spirit and scope of the invention.

CLAIMS:

1. A method of transporting point to point protocol (PPP) traffic over an asynchronous transport link, the method including encapsulating the traffic in minicells, and transporting said minicells in a single virtual circuit.
- 5 2. A method as claimed in claim 1, wherein said traffic originates from a number of users, and wherein said minicells are multiplexed within the virtual circuit.
3. A method as claimed in claim 2, wherein said minicells are of variable length.
- 10 4. A method as claimed in claim 3, wherein said minicells form the payload of fixed length asynchronous transfer mode (ATM) cells.
5. A method as claimed in any one of claims 1 to 4, wherein the PPP traffic incorporates protocol identifiers, and wherein there is a one to one relationship between each said protocol identifier and a respective minicell
15 address.
6. A method as claimed in claim 5, wherein the PPP traffic comprises the ATM packet payload, wherein each said packet incorporates a packet header having a channel identifier field, and wherein the least significant octet of the protocol identifier is transmitted in said channel identifier field.
- 20 7. A method as claimed in claim 6, wherein the channel identifier field incorporates an address space, and wherein the first octet of the payload is selectively available to accommodate the most significant octet of the channel identifier field .
8. A method as claimed in claim 7, wherein the channel identifier field
25 contains an encoded value, and wherein the channel identifier is determined from said encoded value via a stored table of channel identifiers.
9. A method as claimed in claim 7, wherein the least significant bit of the least-significant octet of the channel identifier field is used to indicate the presence or absence of the most-significant octet.

10. A method of trunking voice calls in an ATM network such that the multiple voice channels form a trunk group carried over a single point to point protocol (PPP) ATM trunk.

11. Apparatus for transporting point to point protocol (PPP) traffic over an asynchronous transport link, the apparatus including means for encapsulating
5 the traffic in minicells, and means for transporting said minicells in a single virtual circuit.

1/15

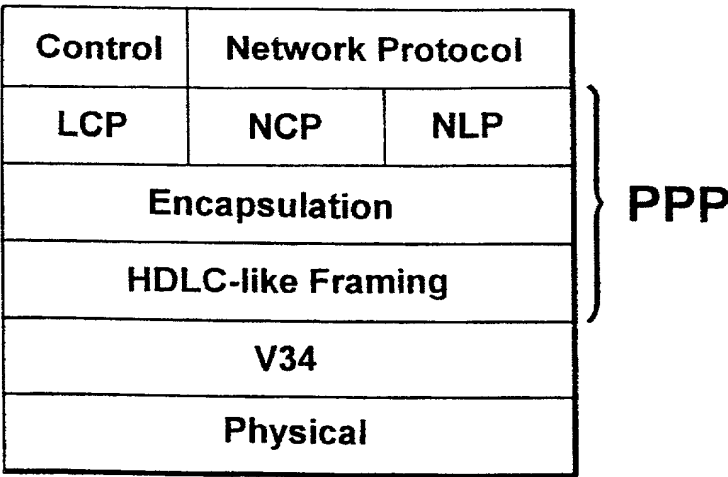


Fig. 1 (Prior Art)

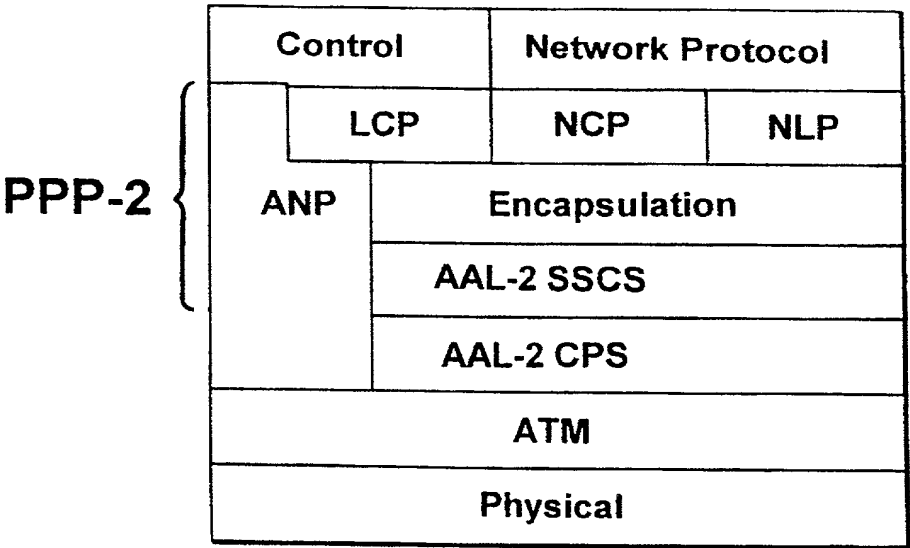
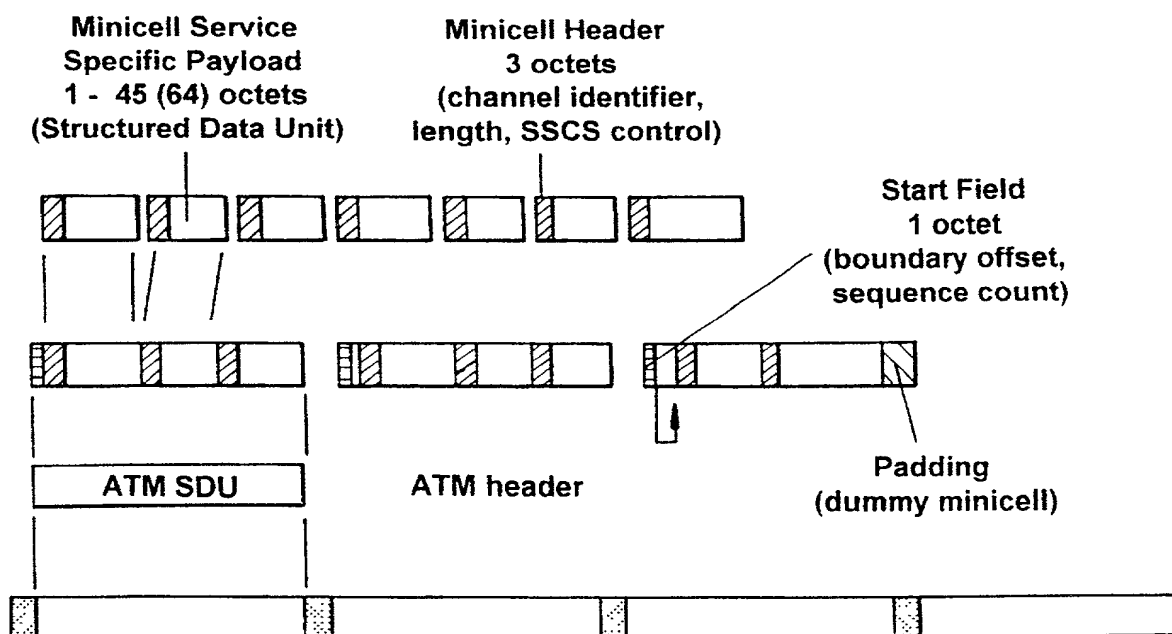


Fig. 4

2/15

Protocol Identifier (8 or 16 bits)	Information	Optional Padding
---------------------------------------	-------------	---------------------

Fig. 2 PPP Format*Fig. 3*

3/15

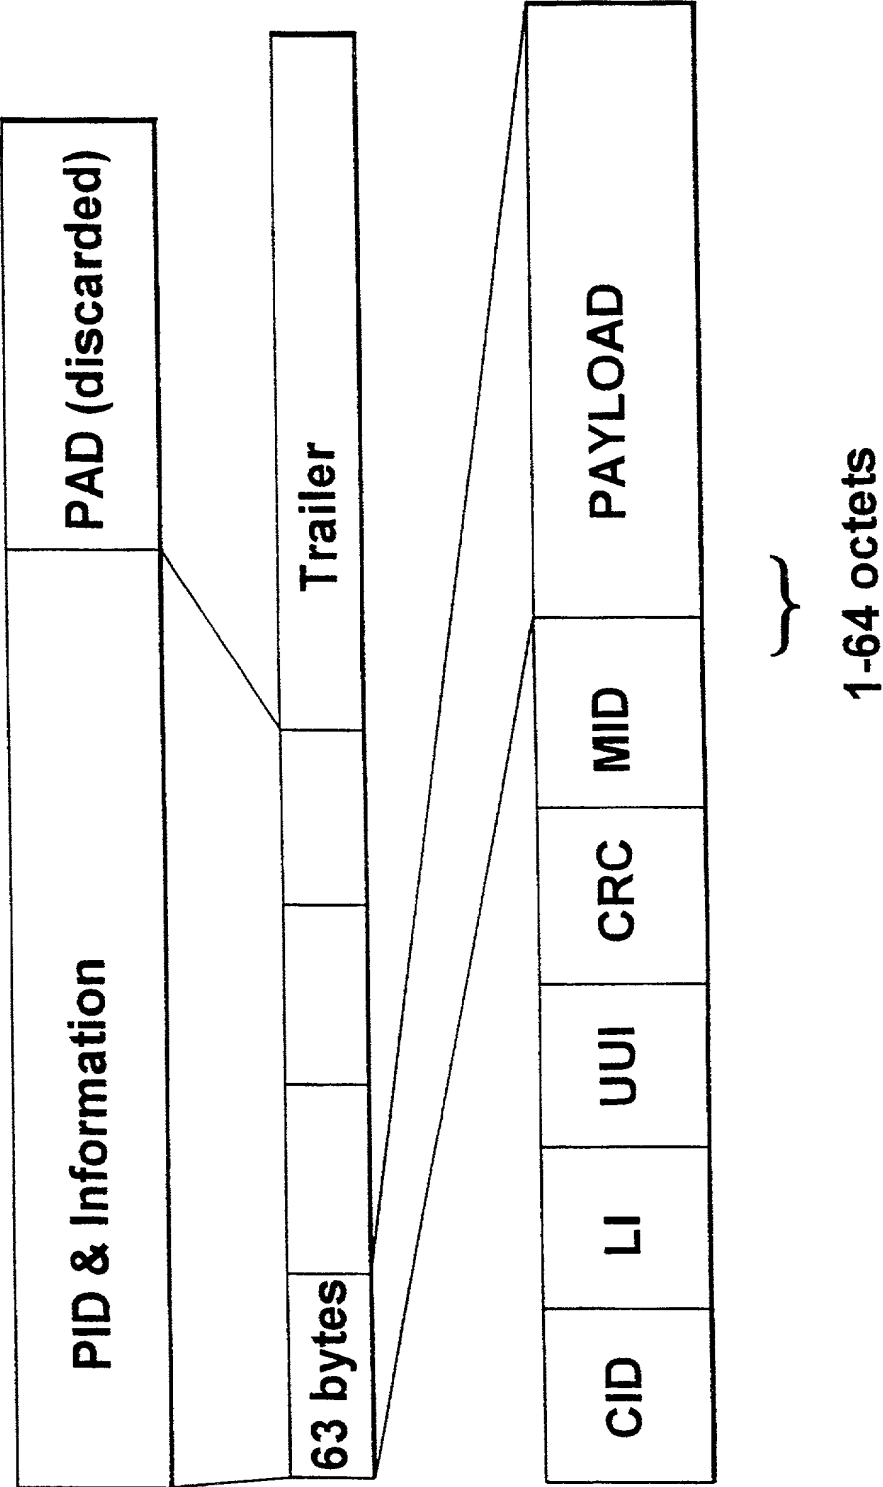


Fig. 5

4/15

Control Information		NLP	
	<table><tr><td>LCP</td><td>NCP</td></tr></table>		LCP
LCP	NCP		
ANP	PPP2 ENCAPSULATION		
SSCS SEGMENTATION & REASSEMBLY			
SSCS MULTIPLEXING/DEMULTIPLEXING			
CPS PACKET ASSEMBLY/DISSASSEMBLY			
CPS PACKET MULTIPLEX/DEMULTIPLEX			
ATM			
PHY			

Fig. 6

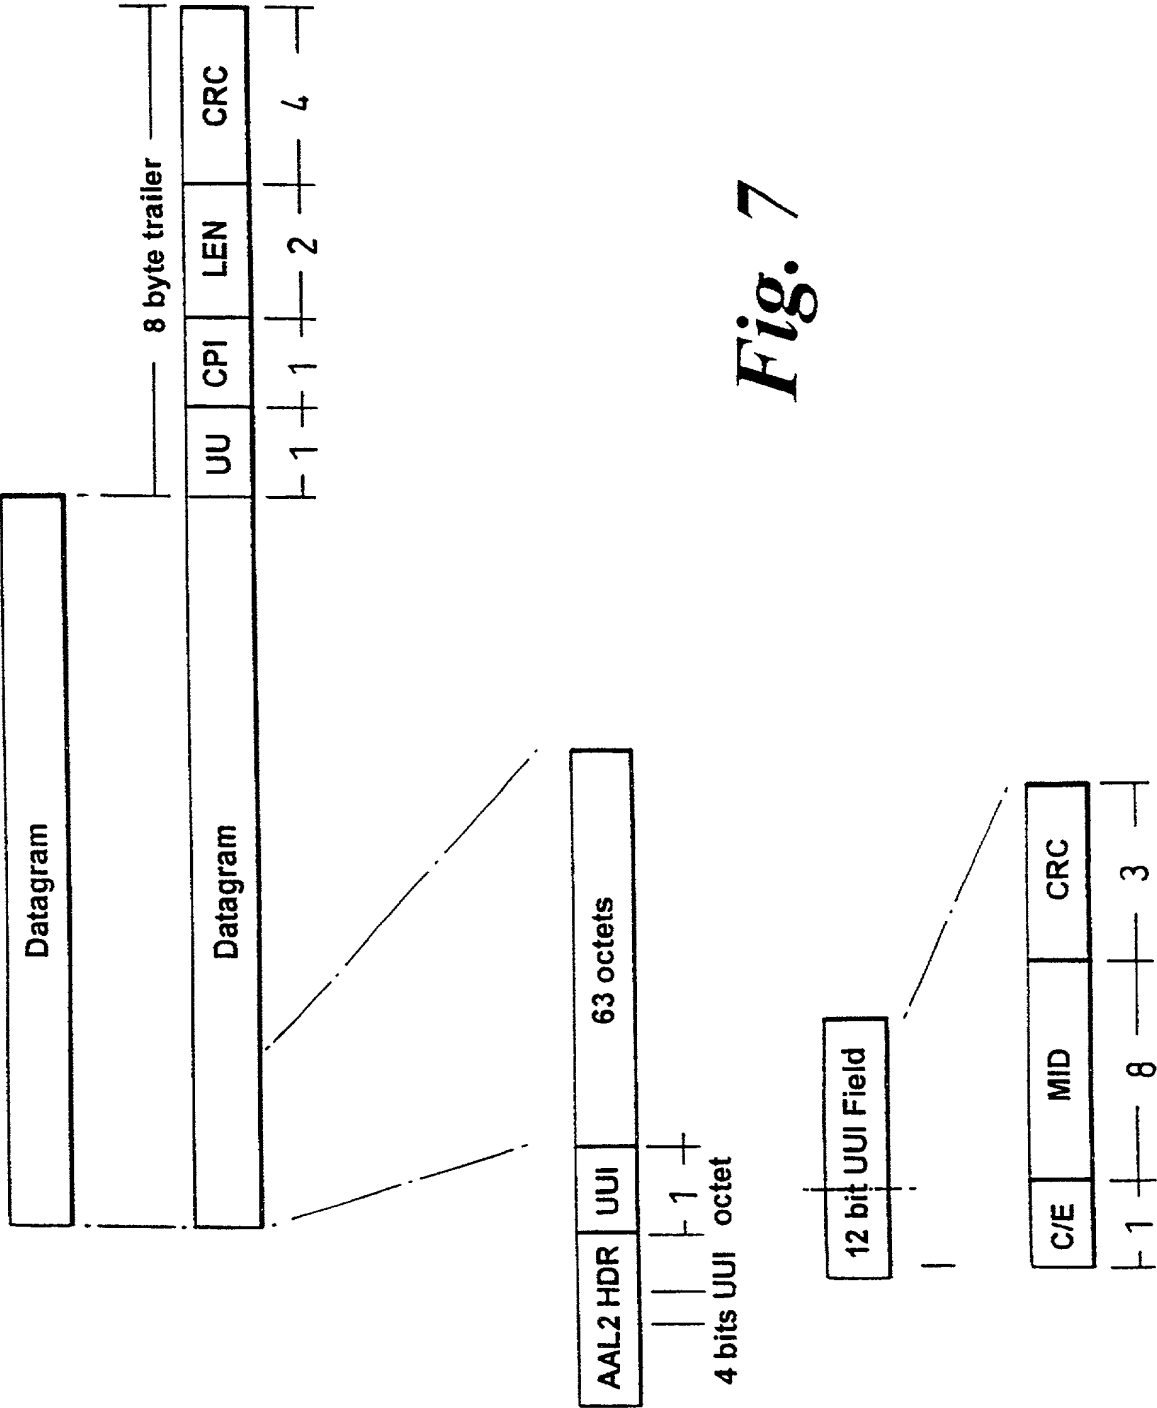
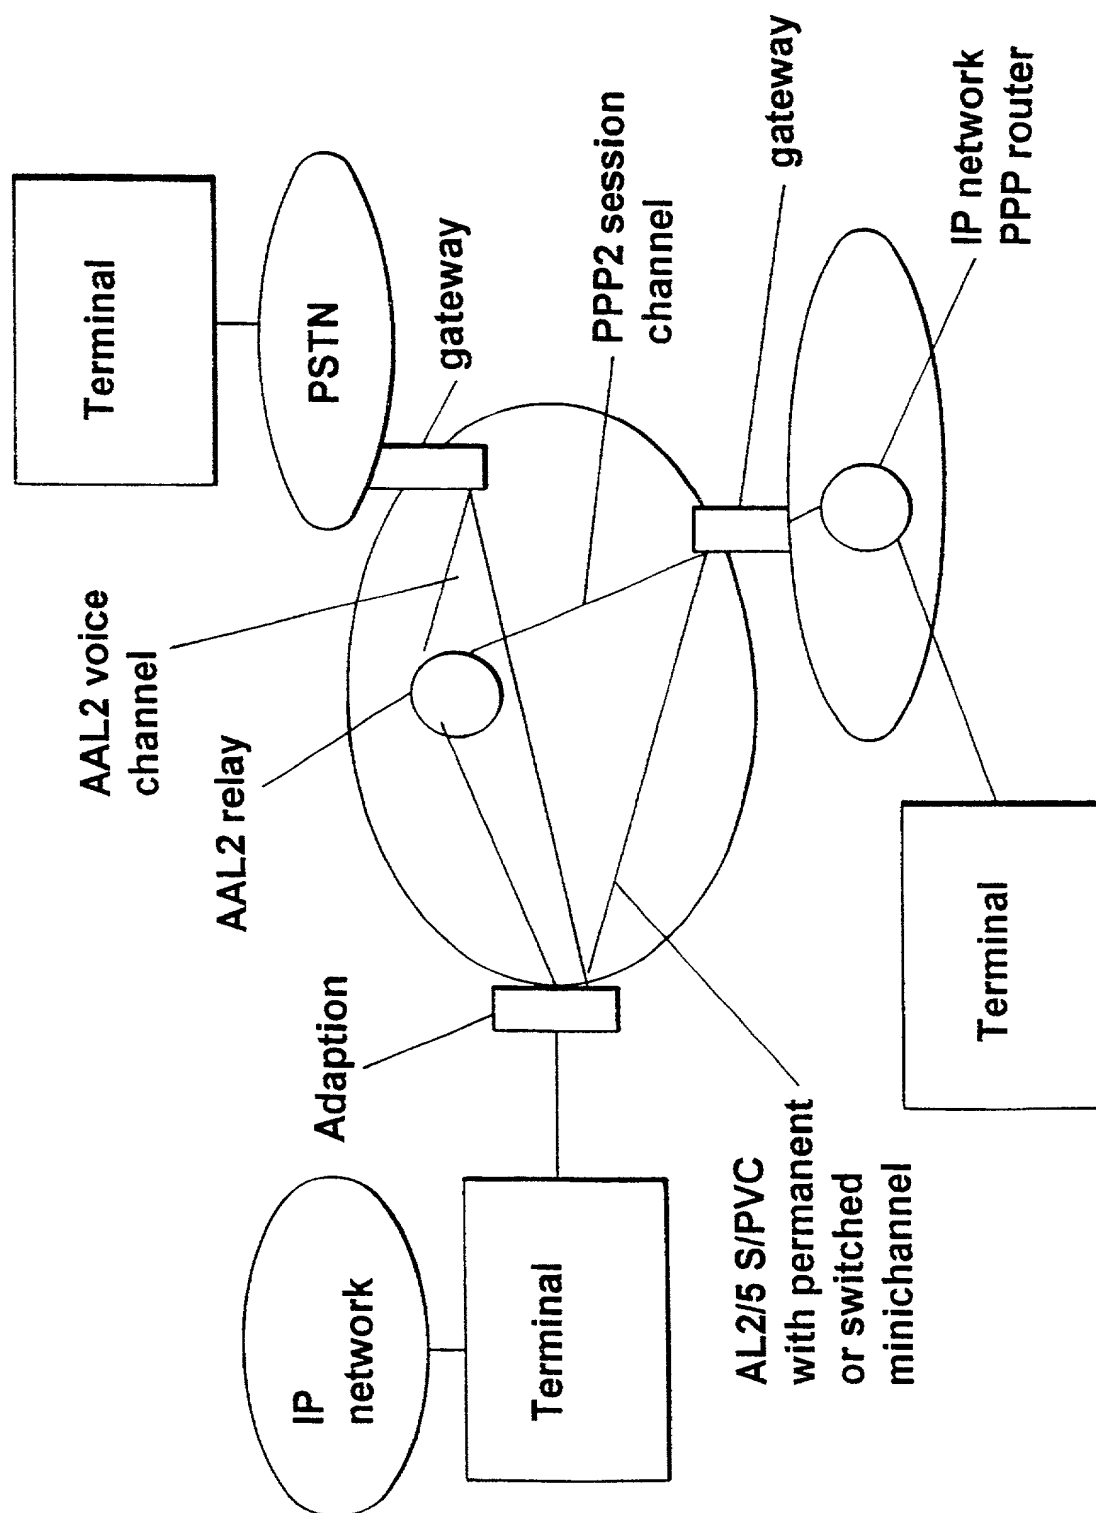


Fig. 7

6/15

*Fig. 8*

7/15

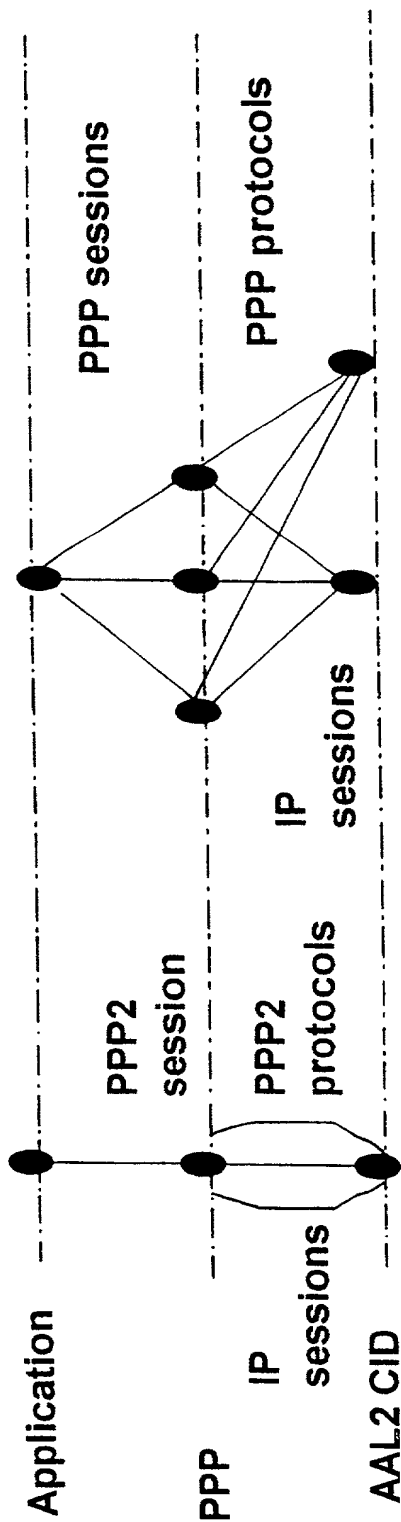


Fig. 8a

Fig. 8b

8/15

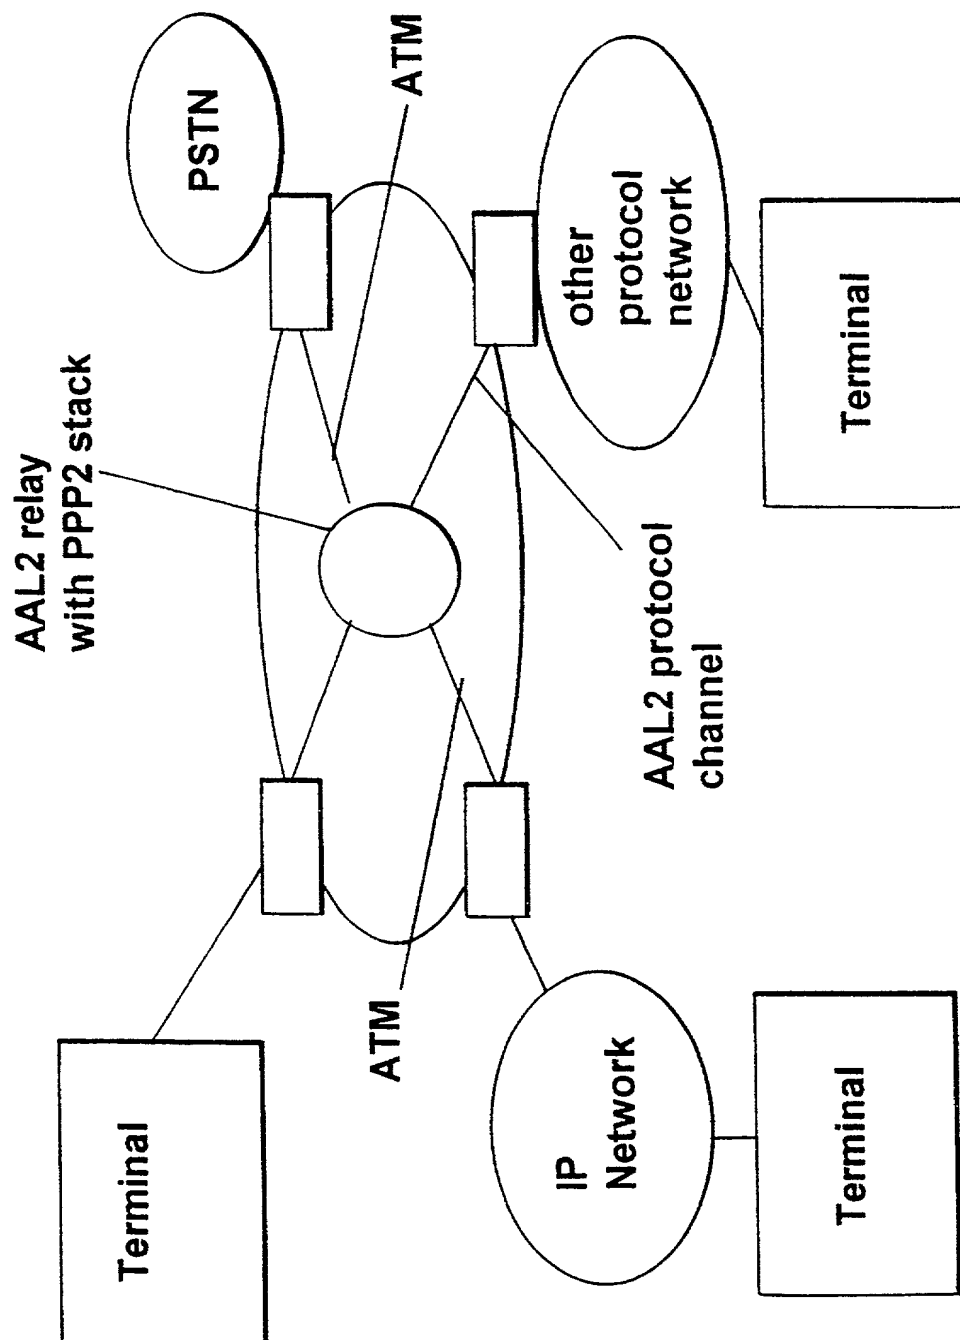
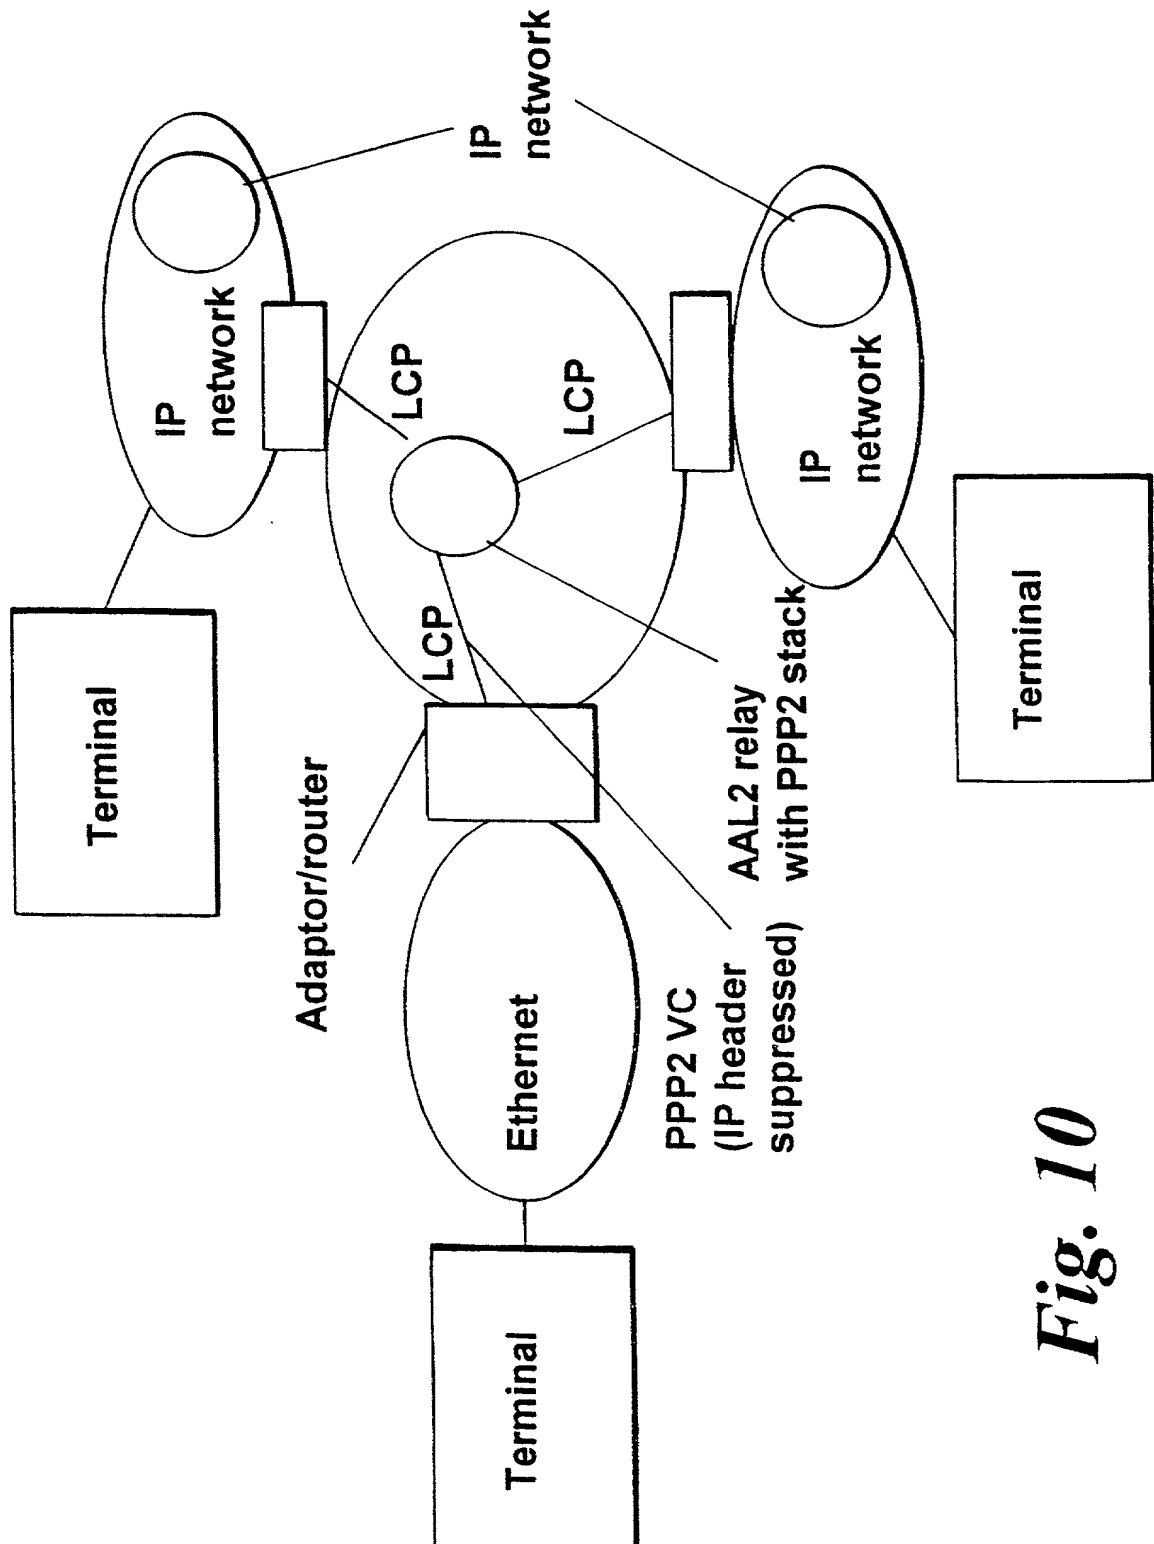


Fig. 9

9/15

*Fig. 10*

10/15

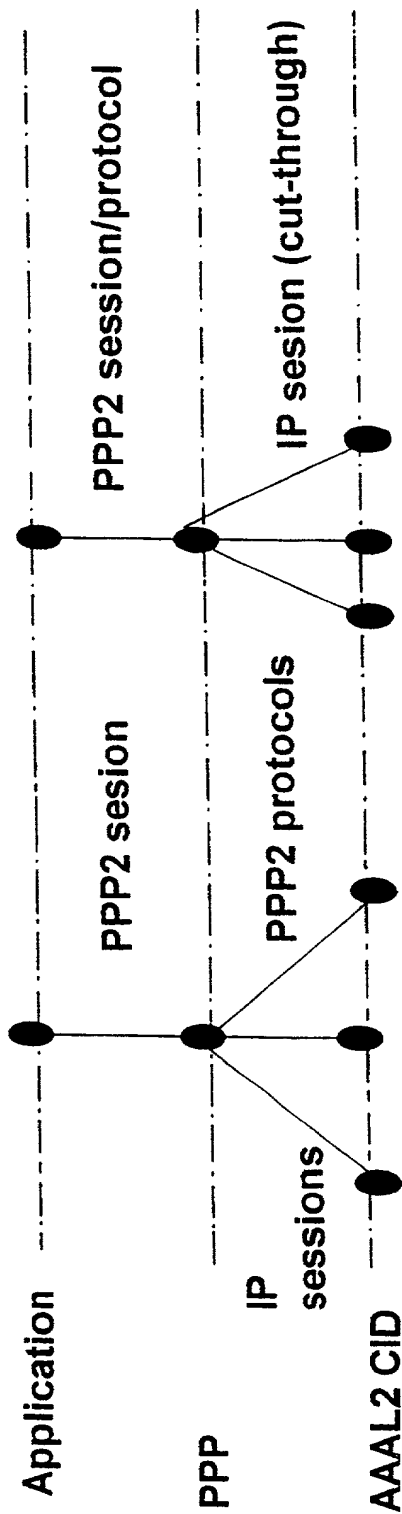


Fig. 9a *Fig. 10a*

11/15

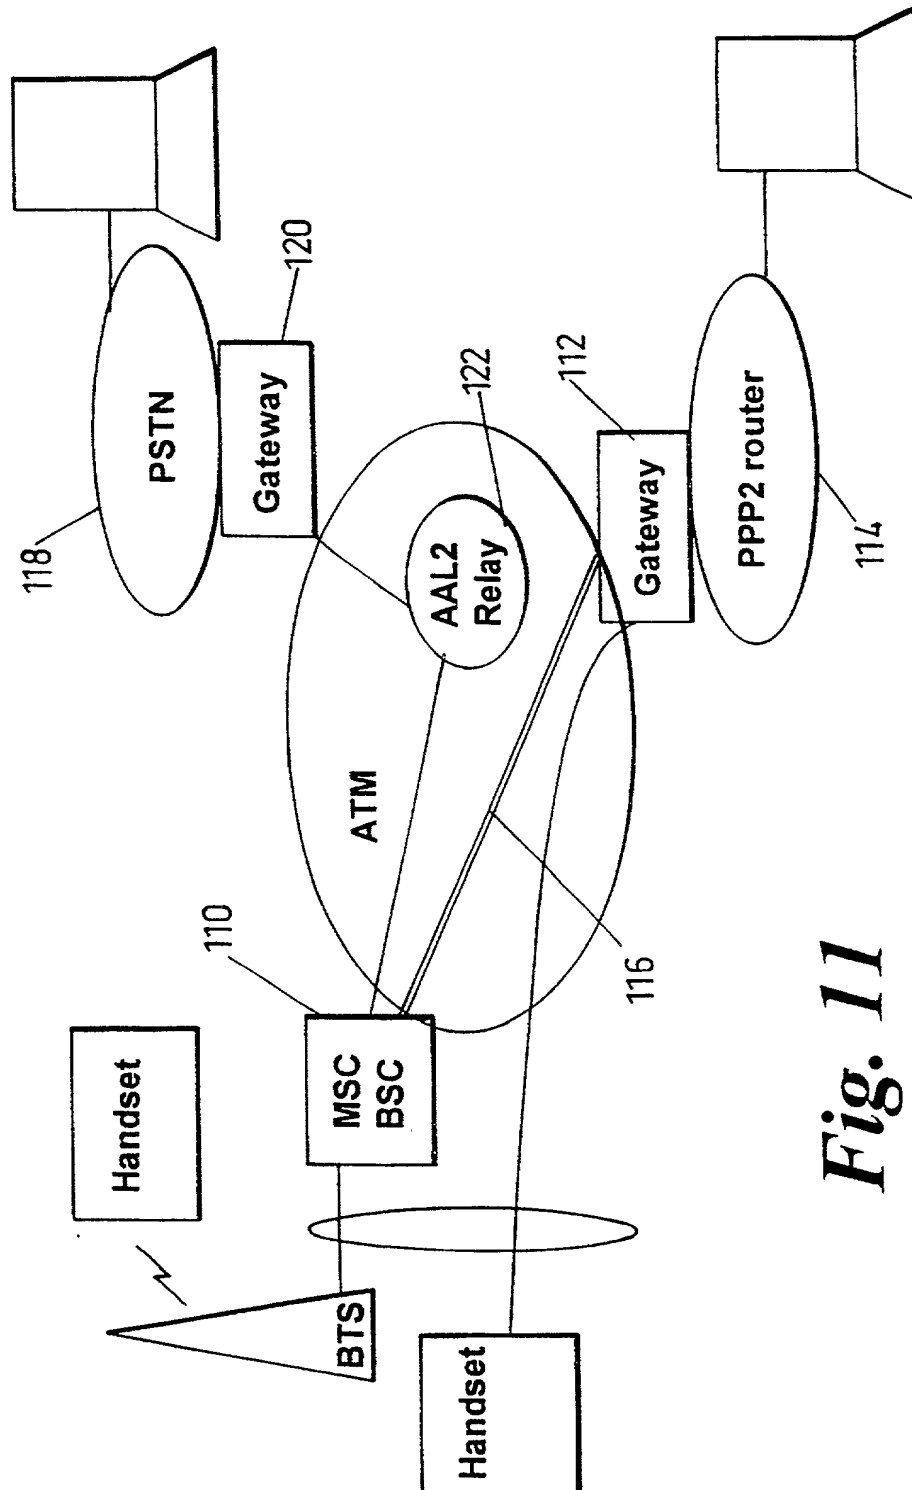


Fig. 11

12/15

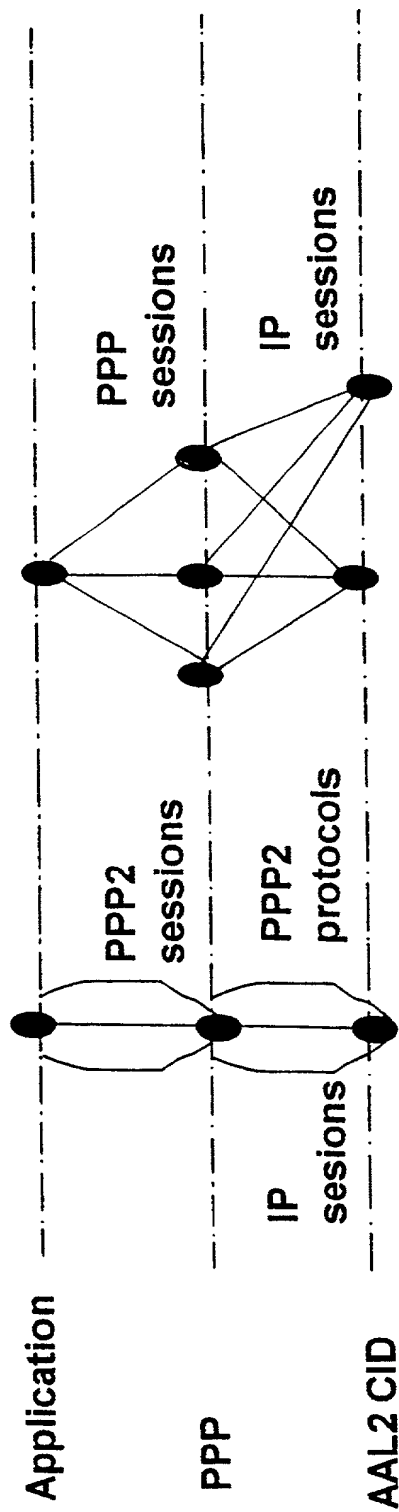


Fig. 11a *Fig. 12a*

13/15

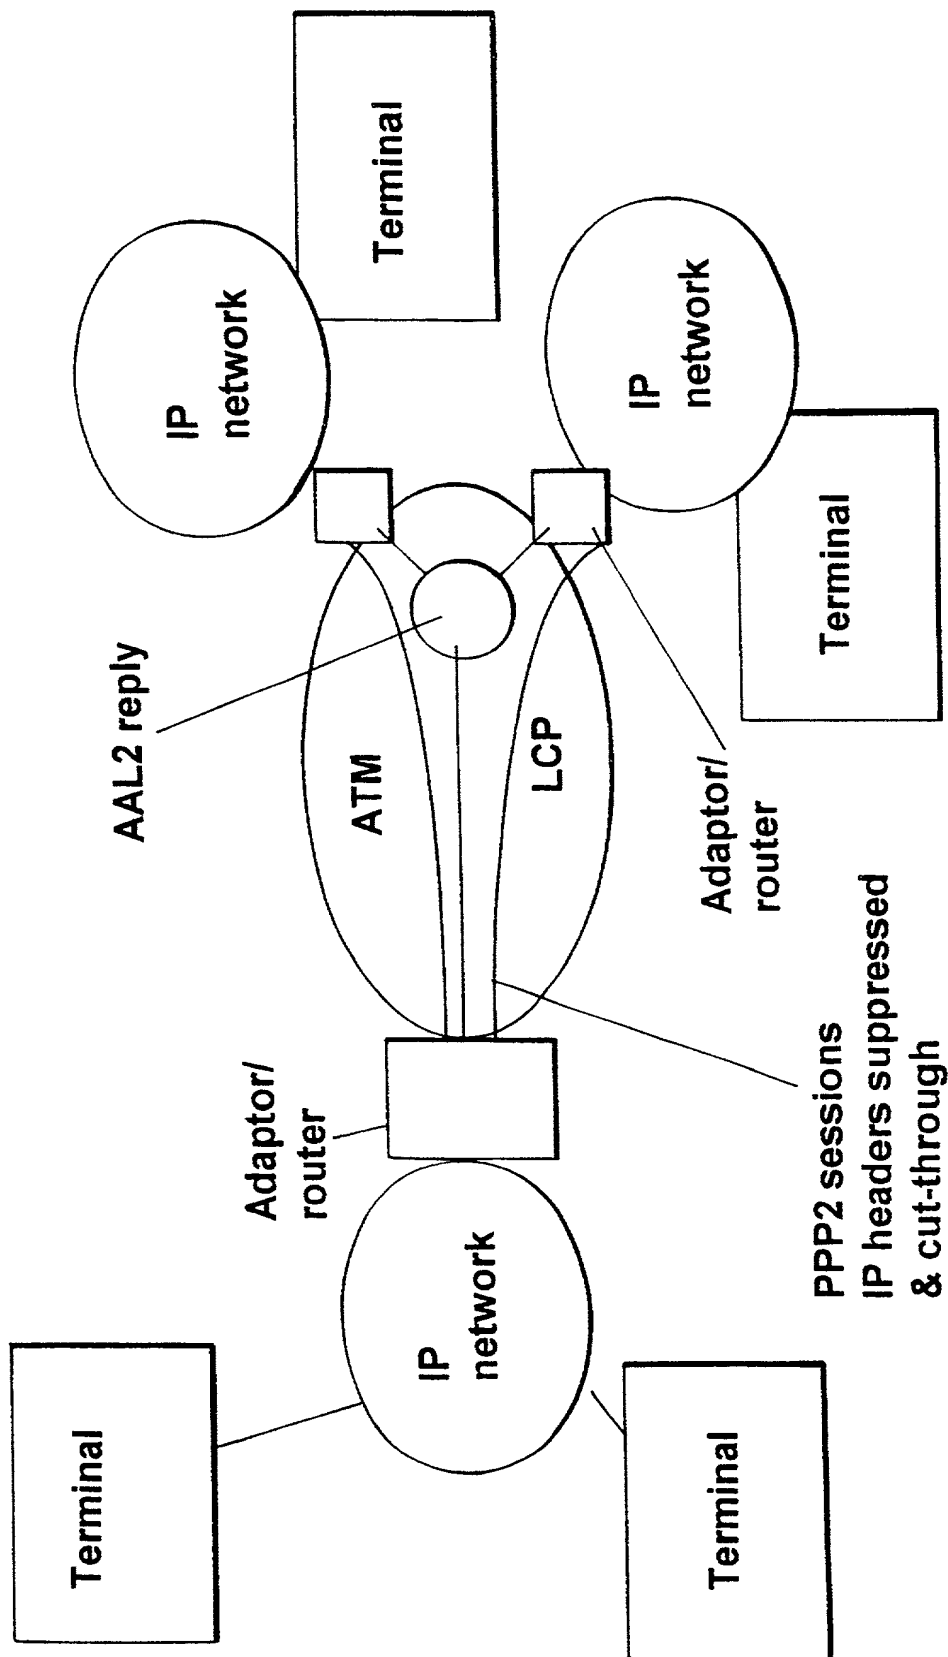


Fig. 12

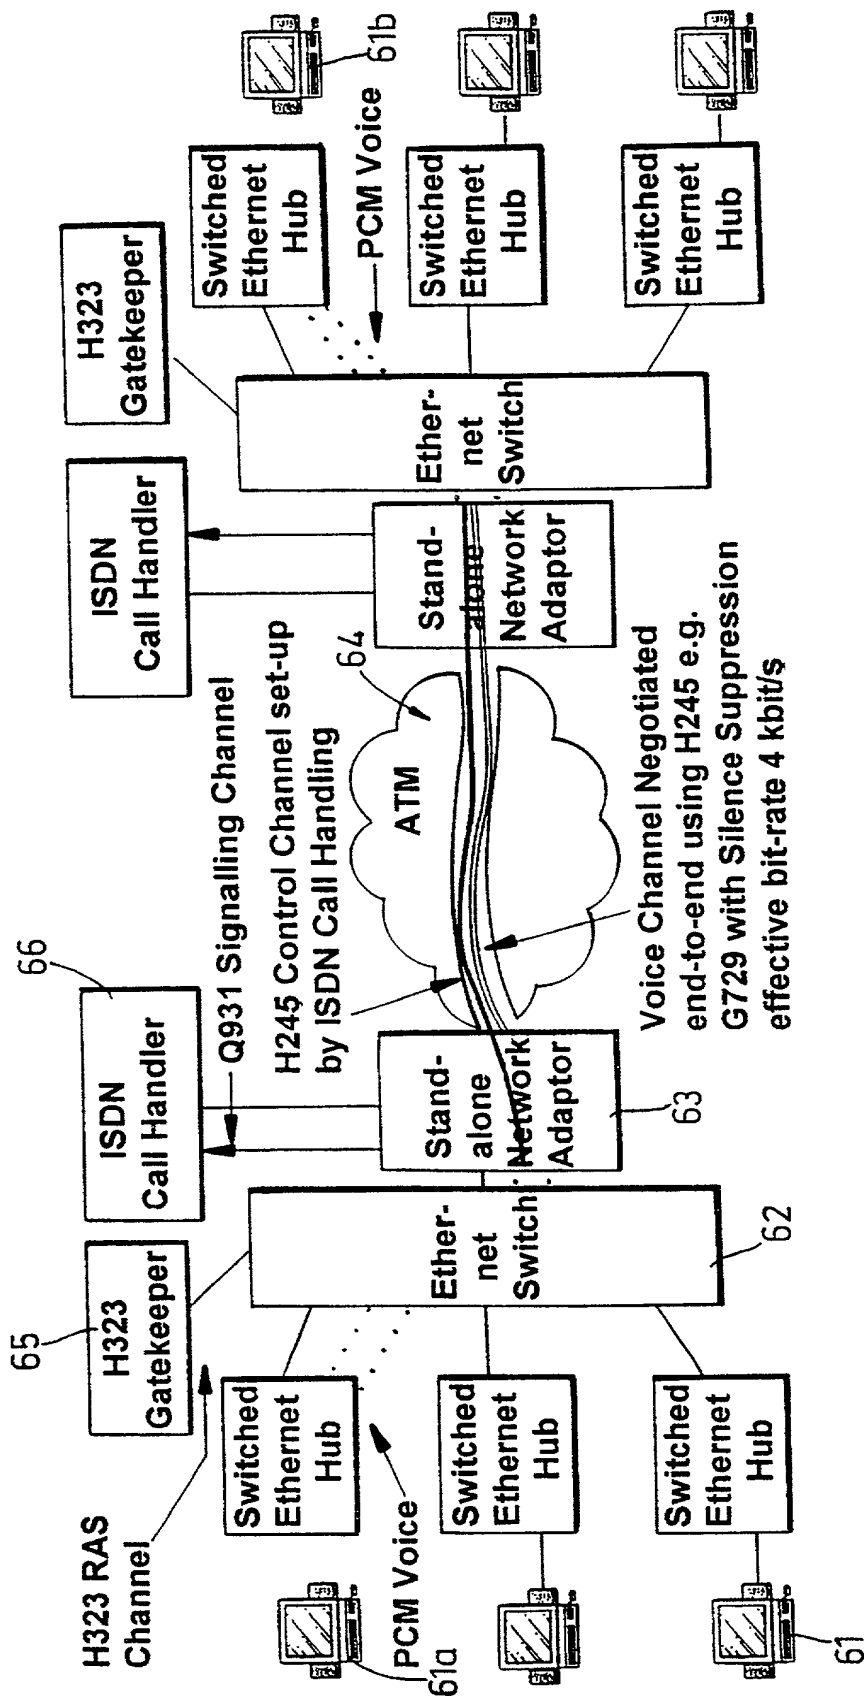


Fig. 13

15/15

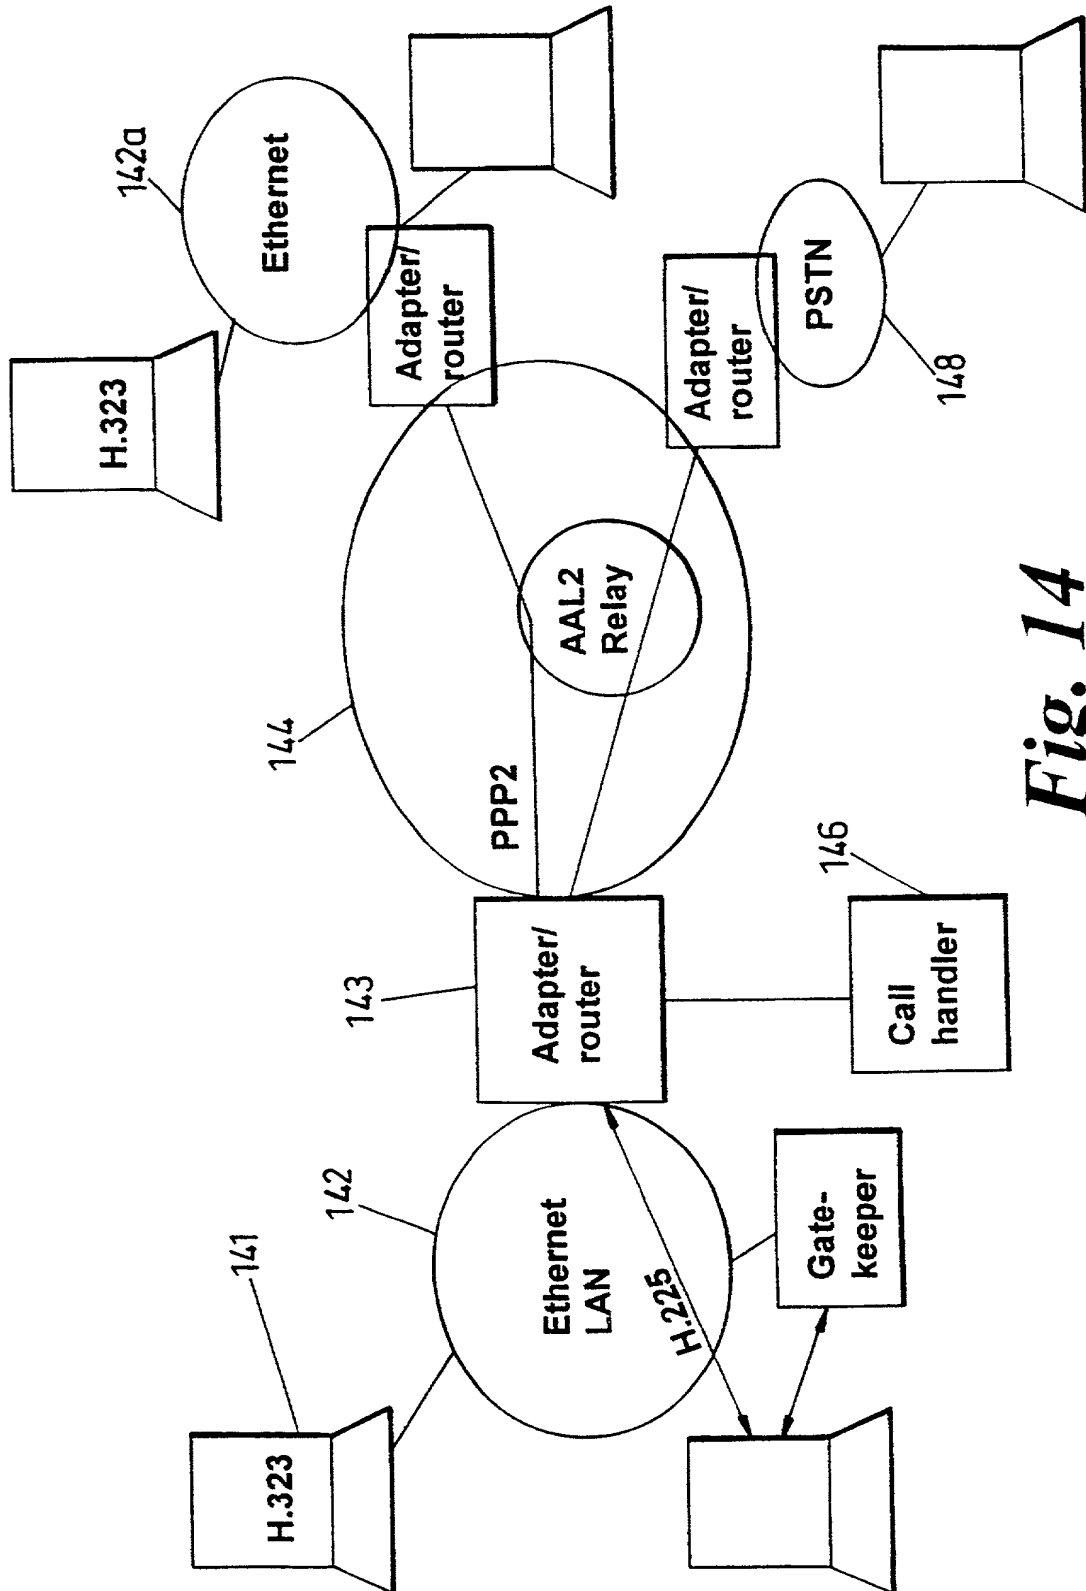


Fig. 14

3

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

TRANSPORTING MULTIPROTOCOL DATAGRAMS

the specification of which:

is attached hereto.

☒ was filed on 21 SEPT 1998 as
Application Serial No. PCT/GB98/02807
and was amended on _____ if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section

119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

<u>Country</u>	<u>Number</u>	<u>Date Filed</u>	<u>Priority Claimed</u>	
			<u>Yes</u>	<u>No</u>
<u>GB</u>	<u>9720130.5</u>	<u>22 SEPT 97</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<u> </u>	<u> </u>	<u> </u>	<input type="checkbox"/>	<input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status</u>
<u> </u>	<u> </u>	<u> </u>
<u> </u>	<u> </u>	<u> </u>

And I hereby appoint Wm. Marshall Lee, Registration No. 16,853, John M. Mann, Registration No. 17,775, Thomas E. Smith, Registration No. 18,243, Dennis M. McWilliams, Registration No. 25,195, James R. Sweeney, Registration No. 18,721, William M. Lee, Jr., Registration No. 26,935, Glenn W. Ohlson, Registration No. 28,455, David C. Brezina, Registration No. 34,128, Jeffrey R. Gray, Registration No. 33,391, Timothy J. Engling, Registration No. 39,970, Gregory B. Beggs, Registration

13 No. 19,286, Gerald S. Geren, Registration No. 24,528 and Peter J. Shakula, Registration No. 40,808 as my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith. It is requested that all communications be directed to Lee, Mann, Smith, McWilliams, Sweeney & Ohlson, P.O. Box 2786, Chicago, Illinois 60690-2786, telephone number (312) 368-1300.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

00 Full name of sole or first inventor: SIMON DANIEL BRUECKHEIMER

Signature S. Brueckheimer Date 11/5/00

Country of Residence: UK

Country of Citizenship: UK

Post Office and Residence Address: 74 Church Crescent

London N10 3NE GBX

United Kingdom

2 - 00 Full name of joint inventor: LESLIE DEREK HUMPHREY

Signature L. D. Humphrey Date 28/5/00

Country of Residence: UK

Country of Citizenship: UK

Post Office and Residence Address: 9 The Swallows

Harlow GBX

Essex CM17 0AR

United Kingdom

3 - 00 Full name of joint inventor: DAVID JOHN STACEY

Signature DJ Stacey Date 15/5/2000

Country of Residence: UK

Country of Citizenship: UK

Post Office and Residence Address: ~~28 Orchard Close~~ 12 CRESSET CLOSE

Stanstead Abbots CBX

Herts SG12 8AA 8LL

United Kingdom

DJS